

## BH GMP-10

**SMALL VOLUME DISPENSING & MOLD FILLING OF  
TWO PART URETHANES, POLYUREAS & EPOXIES**




### FEATURES AND BENEFITS

- AST GMP metering pumps
- Continuous flow up to 0.4 gpm
- Viscosities up to 2,000 cps
- Ratios from 1:1 to 3:1
- ¼ HP 90 V variable speed D.C. motor
- Adjustable flow rate
- 2-1/2 gal. supply containers
- Manual or automatic dispense valve
- Handles non-abrasive materials
- Heated tanks available

AST designs and manufactures a full line of standard and custom meter-mix-dispense machines and accessories.

# PRODUCT SPECIFICATIONS

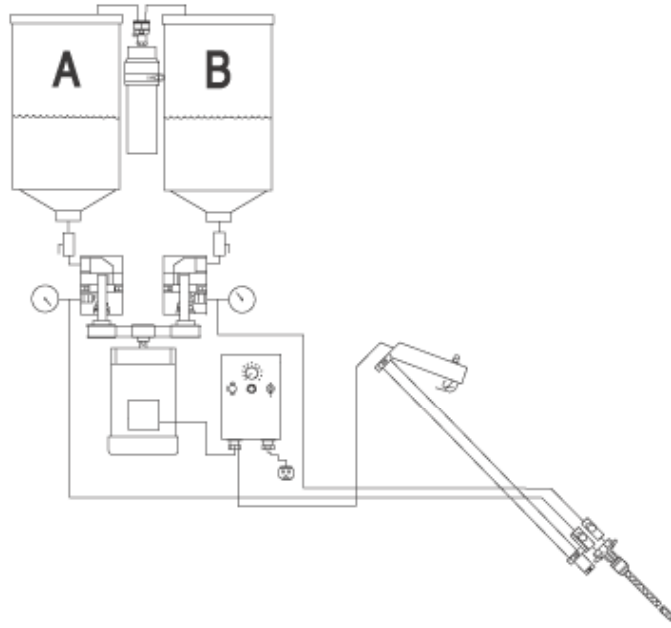

<b>MODEL</b>	BH GMP-010	<b>AIR DRYER</b>	Dessicant cartridge
<b>MACHINE TYPE</b>	Fixed ratio/metering/ dispensing GMP gear	<b>GAUGES</b>	(2) glycerin filled 1000 psi
<b>CONTINUOUS OUTPUT</b>	Up to 0.4 gallon per min.	<b>STANDARD CONTROLS</b>	On/Off; variable speed 12 OV.
<b>RATIO RANGE</b>	1:1 to 3:1	<b>SERVICES REQUIRED</b>	120 V/15 AH, 5 AMP 90 psi, 2 cfm
<b>VISCOSITY RANGE</b>	100 cps to 2,000 cps	<b>APPLICATORS</b>	AST hand held; automatic dual port manifold
<b>CONTAINERS</b>	2-1/2 gallons each side, stainless steel, 16 gauge	<b>MIXER</b>	Disposable, plastic, motionless
<b>MOTOR</b>	1/4 HP DC, 90 volt	<b>HOSES</b>	Teflon core braided stainless steel 3/8" x 10'
<b>METERING PUMPS</b>	(2) heavy duty AST GMP gearotor™	<b>OPTIONS</b>	Heated tanks
<b>DIMENSIONS</b>	21" L x 21" W x 19" D, 100 lbs. empty, shipping weight 150 lbs.		
<b>FRAME</b>	1½" powder coated tubular steel		

**ADHESIVE SYSTEMS TECHNOLOGY CORP.**  
 9000 Science Center Drive • New Hope, MN 55428  
 Ph: 763-592-2060 • Fx: 763-592-2075  
[www.ast-corp.net](http://www.ast-corp.net) • email: [ast@ast-corp.net](mailto:ast@ast-corp.net)